







深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

1. 00mm Board Spacer, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 0.75AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 30m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 500V
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

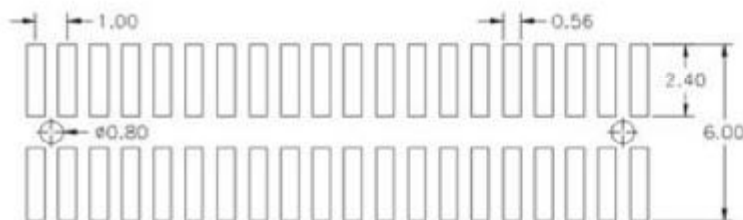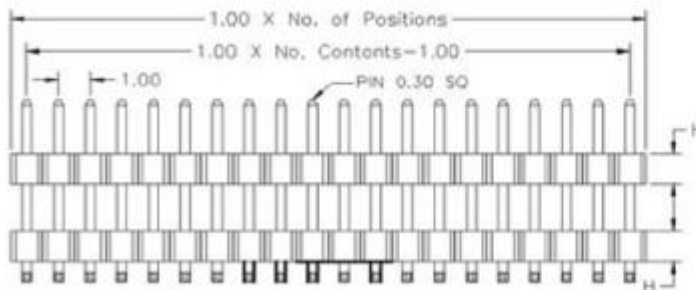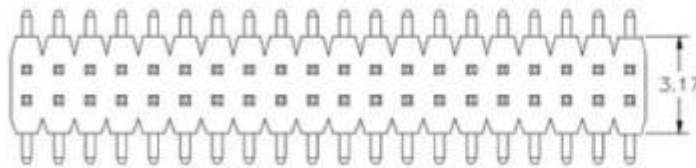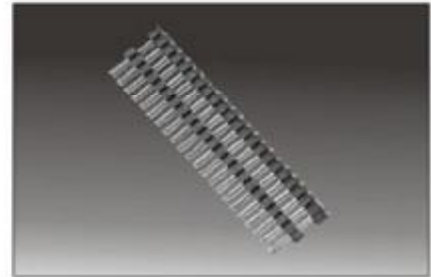

PCB LAYOUT

Ordering Information

1 5 10	—	2	2	XX	G0	M	XXX	01
Plastics Height		No. of Pins Per Row		Contact Plating	Pin Length			
10=1.0mm 15=1.5mm		01~50		SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	XXX=B+C+D+(W-1.0)/2			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢