



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

1.27mm, 0.40SQ Pin Header, Single Row, S.M.T

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn Over 50u" Ni

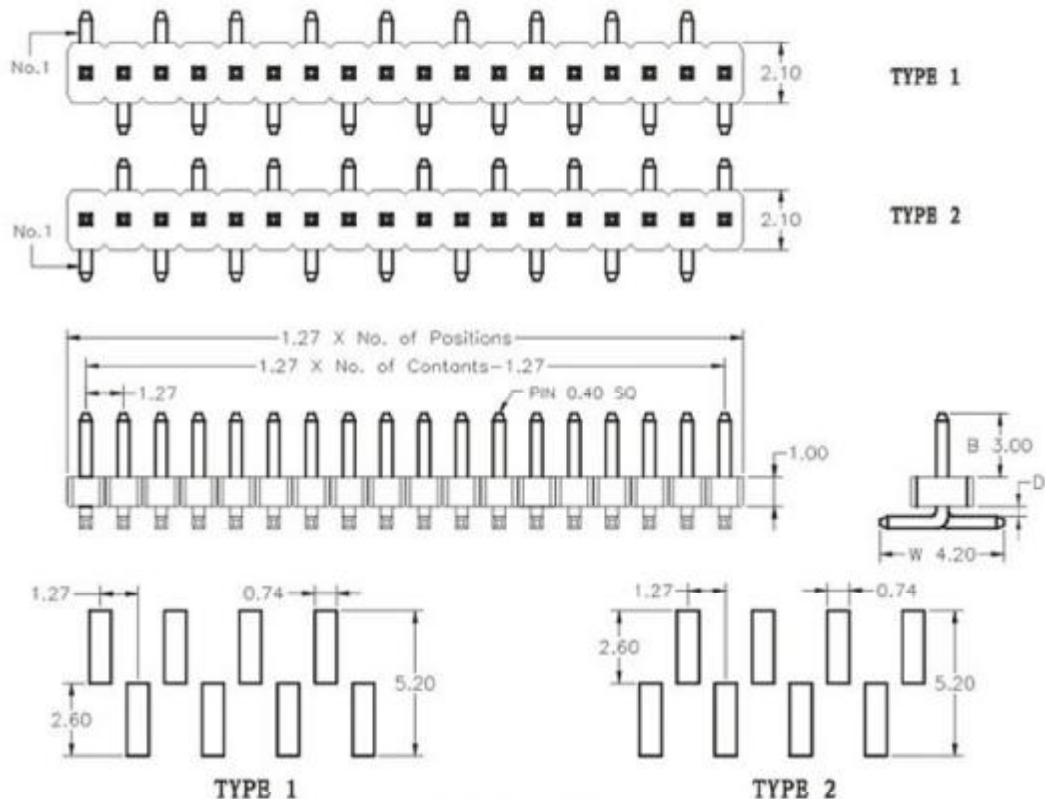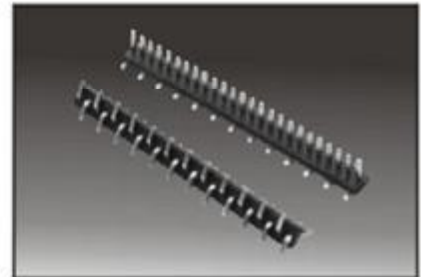

PCB LAYOUT

Ordering Information

1	3	10	—	1	1	<u>XX</u>	<u>G0</u>	M	<u>XXX</u>	01
				No. of Pins Per Row	Contact Plating		Pin Length			
				01~50	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		XXX=B+D+1.00+W/2			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢