





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 1. 27mm, 0.46SQ Board Spacer, Single Row, Straight/Right Angle

#### SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Brass  
 Contact plating : Au or Sn Over 50u<sup>2</sup> Ni

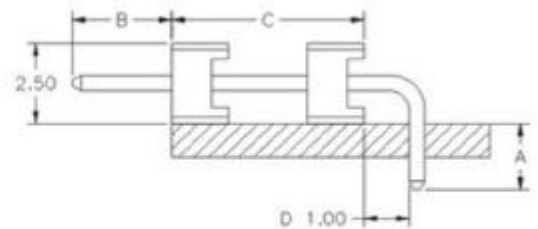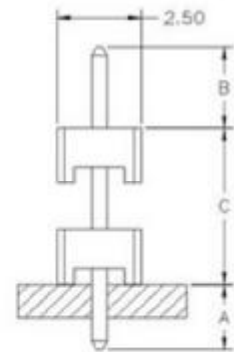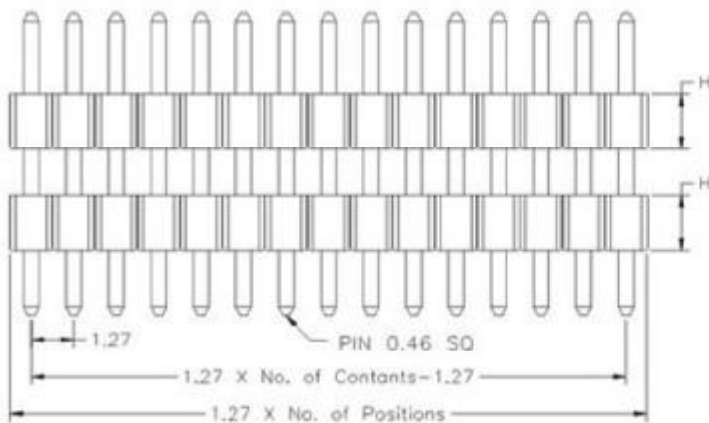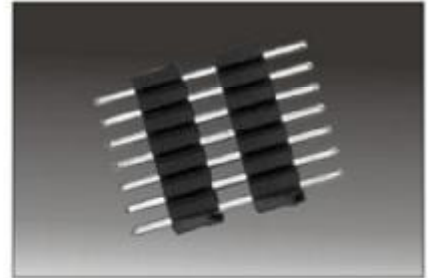

PCB LAYOUT

#### Ordering Information

1	3	25	—	2	1	XX	G0	S	XXX	01
Plastics Height				No. of Pins Per Row		Contact Plating	Connector Type	Pin Length		
17=1.7mm				01~50		SN : Tin	S=Straight	XXX=A+B+C		
25=2.54mm						G0 : Gold Flash	R=Right Angle	XXX=A+B+D+C+1.25		
						G2 : 5u <sup>2</sup> Gold				
						G3 : 10u <sup>2</sup> Gold				
						G4 : 15u <sup>2</sup> Gold				
						G5 : 30u <sup>2</sup> Gold				
						S0 : Gold Flash/Tin				
						Standard: G0				

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢