



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

1. 27mm, 0.40SQ Board Spacer, Single Row, Straight/Right Angle

### SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Brass  
 Contact plating : Au or Sn Over 50u" Ni

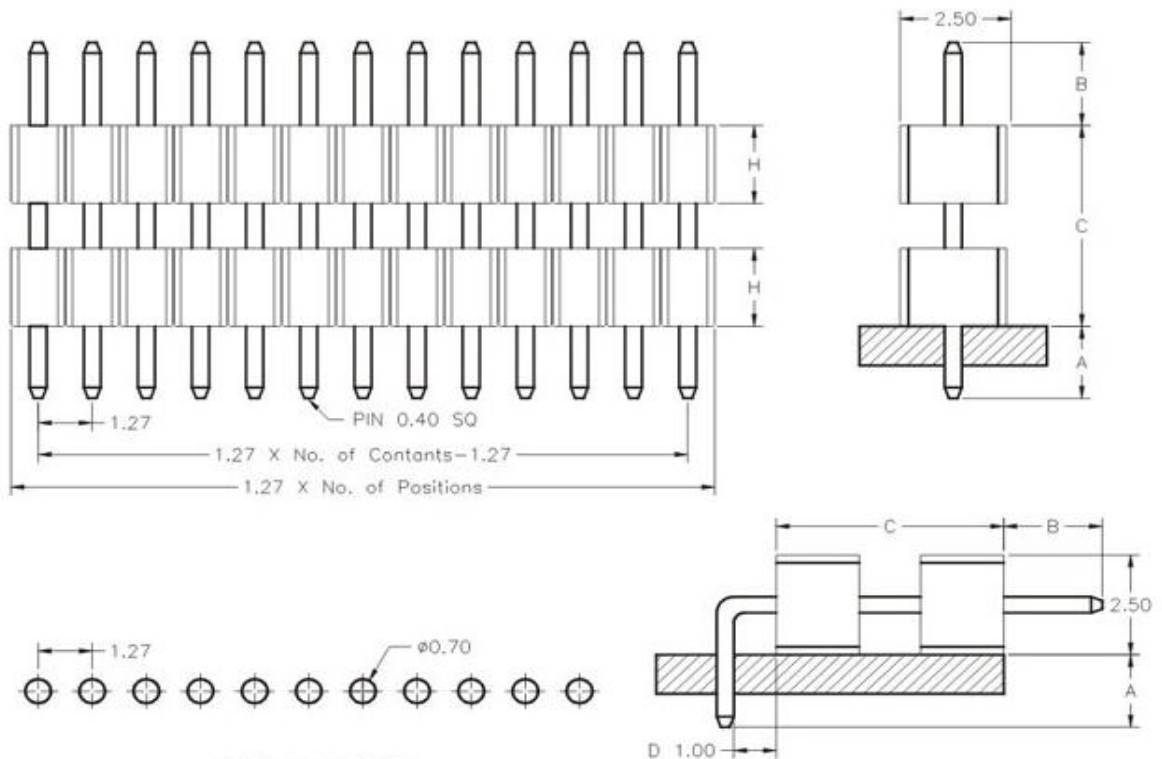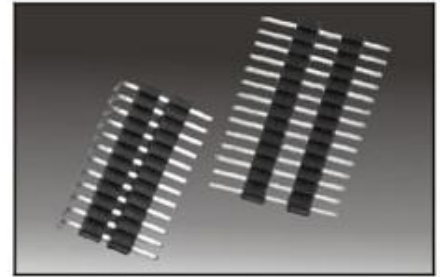

PCB LAYOUT

### Ordering Information

1 3 20 — 2	1 XX	G0	S	XXX 01
Plastics Height	No. of Pins Per Row	Contact Plating	Connector Type	Pin Length
06=0.65mm 20=2.00mm	01~50	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	S=Straight R=Right Angle	XXX=A+B+C XXX=A+D+C+B+1.25

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢