



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.00mm Pin Header, Single Row, Straight

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

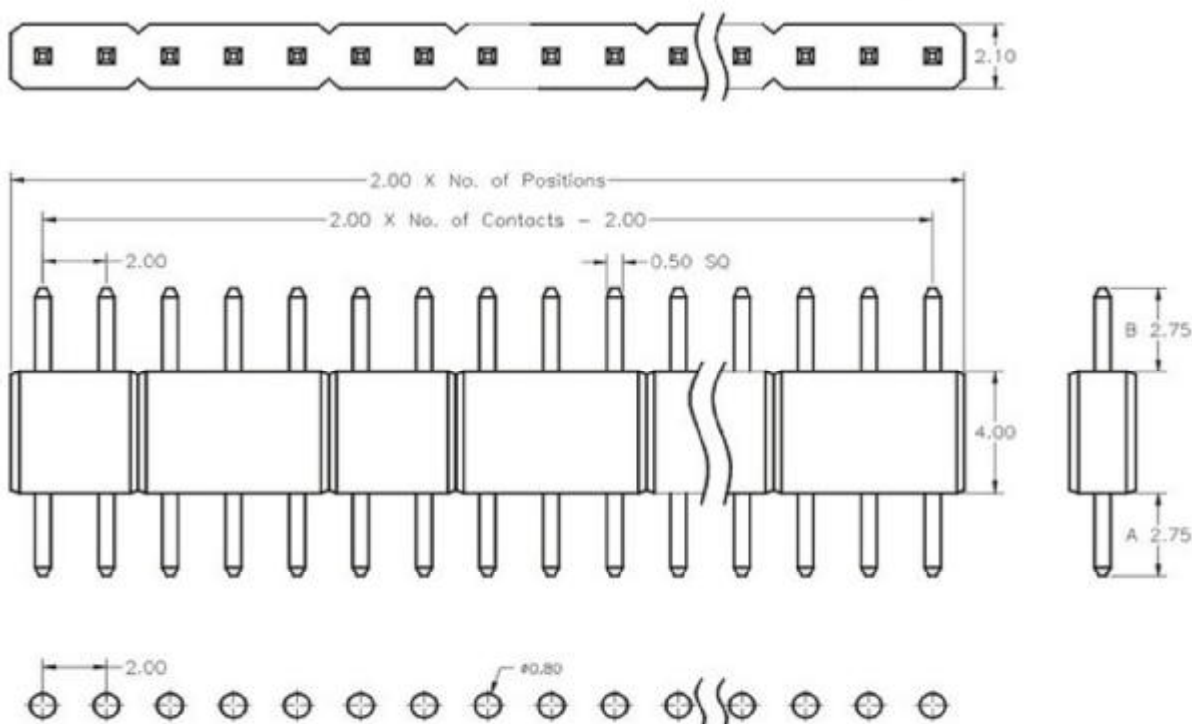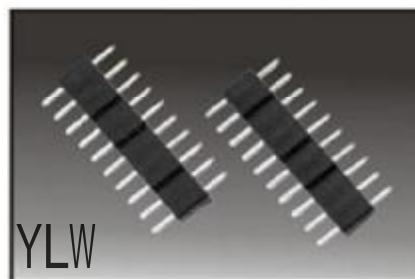

PCB LAYOUT

Ordering Information

1	2	40	—	1	1	XX	G0	S	XXX	01
				No. of Pins Per Row			Contact Plating			
				01~40			SN : Tin			
							G0 : Gold Flash			
							G2 : 5u" Gold			
							G3 : 10u" Gold			
							G4 : 15u" Gold			
							G5 : 30u" Gold			
							S0 : Gold Flash/Tin			
							Standard: G0			
								Pin Length		
								XXX=A+B+4.00		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢