



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 3.96mm Pin Header, Single Row, Straight/Right Angle/SMT

#### SPECIFICATIONS

Current Rating : 6AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: PBT  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni

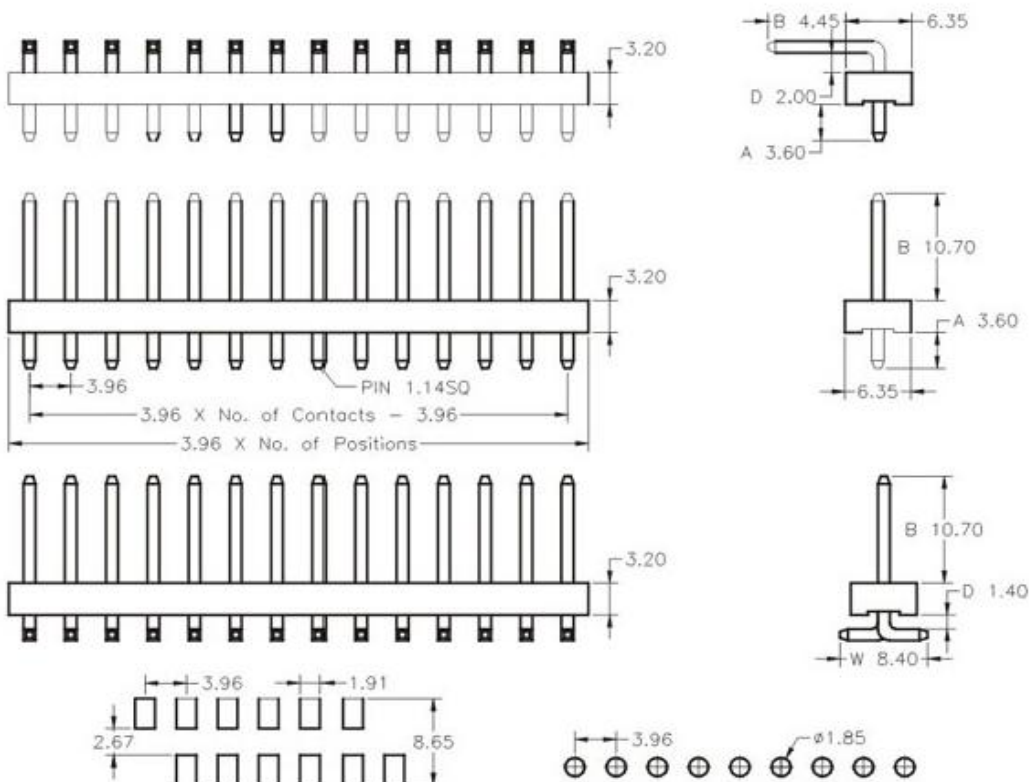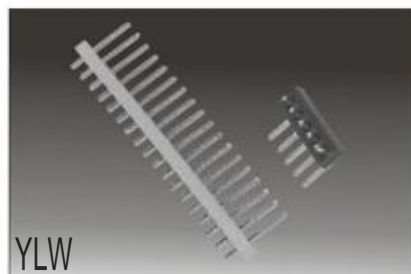

#### PCB LAYOUT

#### Ordering Information

1 9 32	—	1	1	XX	G0	S	XXX	01
		No. of Pins Per Row	Contact Plating		Connector Type		Pin Length	
		01~40	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		S=Straight R=Right Angle M=SMT		XXX=A+B+3.20 XXX=A+B+D+3.20+3.18 XXX=B+D+3.20+W/2	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢