



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

5.08mm Board Spacer, Single Row, Straight/S.M.T

SPECIFICATIONS

Current Rating : 6AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1500V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50uⁿ Ni

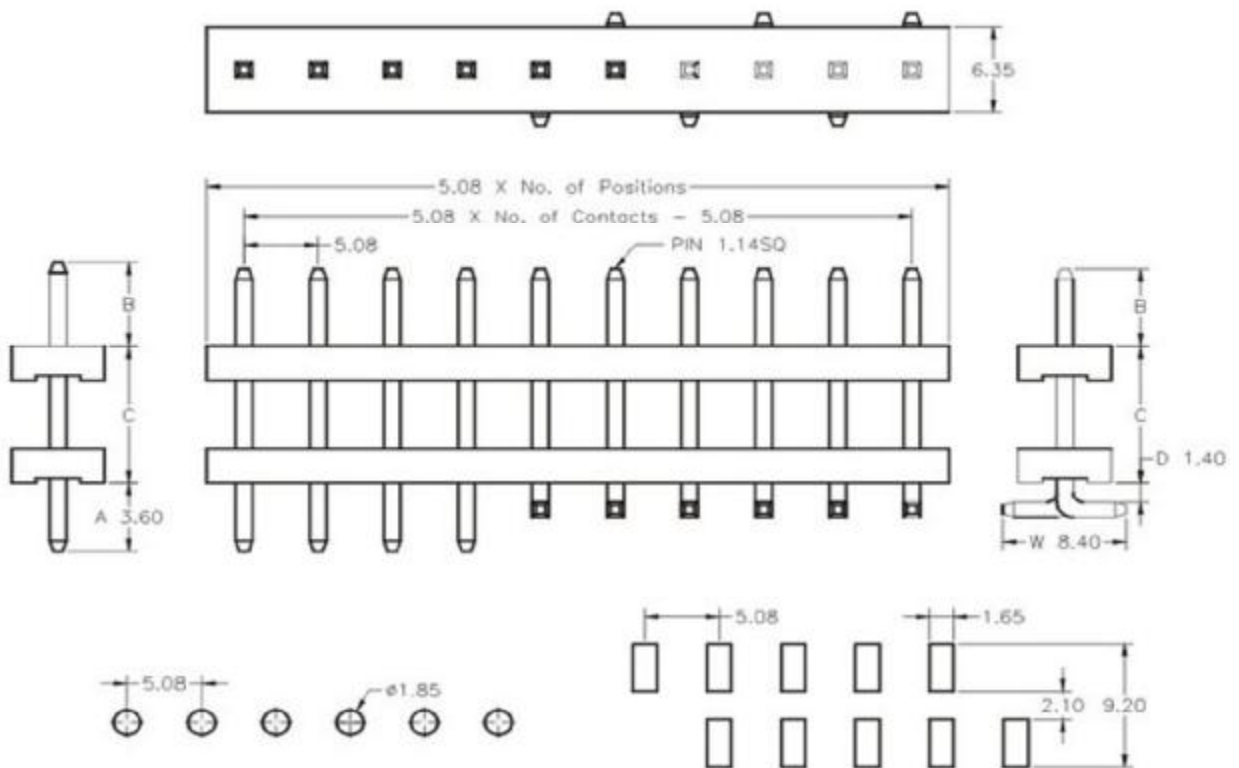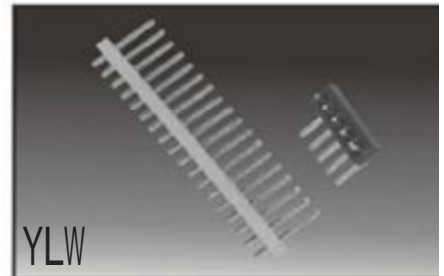

PCB LAYOUT

Ordering Information

1 8 25 — 2	1	XX	G0	S	XXX	01
No. of Pins Per Row 01~40	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0	Connector Type S=Straight M=SMT	Pin Length XXX=A+B+C XXX=B+C+D+W/2			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢